

3.3.1 Number of research papers published per teacher in the Journals notified on UGC CARE list during the last five years

Title of paper	Name of the author/s	Department of the teacher	Name of Journal	Calendar Year of publication	ISSN number	Link to website of the Journal	Link to article / paper / abstract of the article	Is it listed in UGC Care list
Evaluation of ANN, MSP, RBF, Reptrace for Runoff and Sediment Yield	Sanoj Kumar	CE	IJSTR	2020	2277-8616	https://www.ijstr.org/	https://www.ijstr.org/final-print/apr2020/Evaluation-Of-Ann-M5p-Rbf-Reptrace-For-Runoff-And-Sediment-Yield.pdf	yes
Analysis of Strength of Laminated Composite Plate	Vikrant Kumar	CE	IJSTR	2020	2456-124X	https://ijasor.org/		
Wind turbine electrohydraulic transmission system control for maximum power tracking with pump fault.	Neeraj Kumar	ME	Proceedings of the Institution of Mechanical Engineers, Part I: Journal of Systems and Control Engineering: Sage Journals (sagepub.com)	2023			https://journals.sagepub.com/doi/abs/10.1177/09596518231155691	yes
Condition monitoring of hydraulic transmission system with variable displacement axial piston pump and fixed displacement motor	Neeraj Kumar	ME	science direct	2020		https://www.sciencedirect.com/	https://www.sciencedirect.com/science/article/abs/pii/S2214785320370371?via%3Dihub	yes



Neeraj Kumar

Performance analysis of the swastplate axial piston pump with hydraulic fluid temperatures	Necraj Kumar	ME	JSIR	2021		https://op.niscair.res.in/	http://op.niscair.res.in/index.php/JSIR/article/view/37201	yes
Wind turbine electrohydraulic transmission system control for maximum power tracking with pump fault	Necraj Kumar	ME	SAGE Journal	2023		https://journals.sagepub.com/	https://journals.sagepub.com/doi/10.1177/09596518231155691?cid=int-sj-abstract.similar-articles.3	yes
Study of MPPT Techniques in PV Based Renewable Energy System	Ashwini Mishra	EEE	IJITE- International Journal of Innovative Trends In Engineering	2022	2395-2946	https://www.ijite.com/	https://www.ijite.com/citations/IJITE_7403_20595.pdf	YES
Study of MPPT Techniques in PV Based Renewable Energy System	Samrajit Singh	EEE	IJITE- International Journal of Innovative Trends In Engineering	2022	2395-2946	https://www.ijite.com/	https://www.ijite.com/citations/IJITE_7403_20595.pdf	YES
Green House Energy Management System Using ZigBee Communication through Comparison of Energy Usage	Ritu Ranjan Kumar	ECE	IJESRT	2014	2277-9655	International Journal & Magazine of Engineering, Technology, Management And Research (IJMETMR), TRANSFORMING YOUNG ENGINEERS FOR BETTER TOMORROW	http://www.ijmetmr.com/ojJanuary2015/Sin%20gamaneniVenkateshKumar-VPrasannanjanevaredy-2.pdf	YES



A Survey on IoT and Big Data : Relationship and Challenges	Dr. S.K.JHA	CSE	IISR	2021	2455-1503	https://www.iisr.net		yes
A Comprehensive study on IOT: Major challenges	Dr. S.K.JHA	CSE	IISR	2021	2348-6112	https://www.iisr.net		yes



Devesh Kumar

Evaluation of ANN, M5P, RBF, Reptree for Runoff and Sediment yield

Sanoj Kumar, Birendra Bharti, H.P. Singh

Abstract: There are many water resources problems are the nature of prediction and estimation of rainfall, runoff, contamination concentration and water stages etc. Solving these problems with the conventional techniques are computationally expensive and far from the real-life situation. It is most useful for watershed management. In the present study, runoff and sediment yield are evaluated respectively by different model on the Nagwan watershed. This watershed is located on the upper part of the Sewani River in Hazaribagh district of Jharkhand. The input parameters rainfall, temperature, relative humidity, wind velocity, dew point and output parameters are runoff, sediment yield. The monthly data from 1983 to 2006 are used for training and from 2007 to 2016 are used for testing. For the prediction of runoff and sediment yield different type of models are used i.e. ANN, M5P, RBF, Reptree. In the present study model evaluation criteria i.e. NSE, CC, RSR, Pbias, R² are calculated. The value of NSE, CC, RSR, PBIAS and R² of Runoff are found as 0.99, 0.98, 0.30, 0.15, 0.99 during calibration and 0.98, 0.98, 0.45, 0.56, 0.98 during validation and the evaluation criteria of NSE, CC, RSR, PBIAS and R² of Sediment Yield are found as 0.99, 0.98, 0.46, 0.67, 0.59 during calibration and 0.98, 0.96, 0.58, 0.02, 0.98 during validation. In this study we found that prediction of runoff and sediment yield value M5P model is the best model. Keywords: M5P, ANN, RBF, NSE, CC.

1 INTRODUCTION

The hydrological phenomena, the variation due to runoff and sediment yield in the catchment. A linear and non linear hydrological models have been developed in 1930 for explaining the processes of rainfall, runoff and sediment yield in the watershed and these very useful for the prediction. Many parameters are required to process the hydrological model like surface roughness, watershed treatment, conservation practices, soil moisture variation, soil horizon, topographic data, watershed treatment, land uses, soil characteristics etc. For describing the hydrological model following assumption are made, 1) Uniform soil group 2) uniformly distributed over the catchment 3) Slope approximations, etc. The assumptions are very useful for the development of classical model. Apart from that, ANN based approach method is very flexible for the determination of catchment characteristics. The artificial neural network (ANN) approach includes both linear and non linear concepts for the development of model. The ANN model minimises the error effectively. Kumar et al. (2002) investigated utility of ANN for the estimation of daily reference crop evapotranspiration and compared the performance with the conventional method (24). Kim et al. (2003) used ANN to forecast draught and the result indicates that the conjunctive Models significantly improve the ability of ANN to forecast the indexed regional draught (23). Jain et al. (2004) applied knowledge of ANN to analyze the soil water retention data (21).

Kumar et al. (2005) used artificial neural networks (ANNs) in rainfall-runoff modelling has suggested certain issues that are still not addressed properly (33). Sarangi and Bhattacharya (2005) developed for the prediction of sediment yield were validated using the hydrographs and silt load data of 1995–1998 for the Banha watershed in the Upper Damodar Valley in Jharkhand state in India (32). Raghuvanshi et al. (2006) developed to predict both runoff and sediment yield on daily as well as weekly basis from simple information of rainfall and temperature (30). Upadhayay et al. (2009) predicted Runoff and sediment yield from an Indian watershed during the monsoon period were forecasted for different time periods (daily and weekly) using the back propagation artificial neural network (BPANN) modelling technique (4). Goyal (2014) predicted the sediment yield generated within a watershed is an important input in the water resources planning and management (29). The focus of present study is to evaluate the performance of ANN, M5P, RBF, Reptree for Runoff and Sediment yield in Nagwan watershed of the upper part of the Sewani river in Hazaribagh of Jharkhand.

2 STUDY AREA

The Nagwan watershed is located at the upper part of the Sewani river between 85.2500 to 85.4300 E longitudes and 23.9900 to 24.1200 N latitude within the Damodar-Barakar catchment in India. The watershed is just 7 km from the soil conservation department of D.V.C. at Hazaribagh, Jharkhand. The catchment is rectangular in shape with an area of 92.46 sq. km shown in figure 1. Geologically, the area is quite complex, having rocks of varying composition, the soils of the area are mainly of clay loam type. The maximum and the minimum elevations of the area are 637 m and 564 m, respectively from mean sea level. The catchment has very undulating and irregular slope varying from 1 to 25%. The area experiences sub-humid sub-tropical monsoon type of climate, characterized by hot summers (4000C) and mild winters (400C). The total annual precipitation of 1200 mm is distributed mainly between June to September. The mean monthly relative humidity varies from a minimum of 40% in the month of April to a maximum of 85% in the month of July.

* Sanoj Kumar, M.Tech. student, Department of Water Engineering and Management, Central University of Jharkhand, India-835205, Email: sanojkumar.cuj@gmail.com Correspondence Author: Birendra Bharti, Assistant professor, Department of Water Engineering and Management, Central University of Jharkhand, India-835205, Email: birendrabharti@gmail.com
* H.P. Singh, Professor, Department of Water Engineering and Management, Central University of Jharkhand, India-835205, Email: singh.harendra121@gmail.com

ANALYSIS OF STRENGTH OF LAMINATED COMPOSITE PLATE

Vikrant Kumar¹, Prof. Kapil Soni²

¹M.tech scholar Rabindranath tagore University Bhopal

²H.O.D of Civil Engineering Department Rabindranath Tagore University Bhopal

ABSTRACT: Composites are advanced engineering materials with superior properties that can be modified among the purpose of application. The requirements of the design are accomplished by the combination of two or more distinct materials on macroscopic scale in order to improve the desired property like Strength, Stiffness, Corrosion, Resistance, Fatigue, Life, Weight, Attractiveness, Thermal insulation or Conductivity. The advanced improvements generally result in challenging design applications which require professional expertise. Their high strength-to-weight ratio exceeding that of the constituents is the main attribute which makes mechanics of composite materials a more popular area of interest. The user of fiber reinforced composite materials has increased rapidly in recent years. Application fields of composite materials are continuously expanding from traditional application areas such as military aircraft to various engineering fields such as automobiles, robotics, day to day applications, building industry etc.

Several researchers like Singh and Kumar (1998), Akhras and Li (2007) and Ganesan and Liu (2008), reported that first ply failure load. A computer code has been developed to predict the behavior of laminated composite skew plate using higher order shear deformation theory. After exploring the performance of the present FE model based on the HSDT, some new problem are solved to study the failure load of laminated composite skew plate. Various laminated composite skew plate having symmetric, anti-symmetric lamination schemes subjected to uniformly distributed load are considered for six boundary conditions (SSSS, CCCC, SSCC, SCSC, CCFF, CFCF).

Keywords: laminated composite plate, first ply failure, HSDT

I. INTRODUCTION

Composites are advanced engineering materials with superior properties that can be modified among the purpose of application. The requirements of the design are accomplished by the combination of two or more distinct materials on macroscopic scale in order to improve the desired properties like strength, stiffness, corrosion resistance, fatigue life, weight, attractiveness, thermal insulation or conductivity. The advanced improvements generally result in challenging design applications which require professional expertise. Their high strength-to-weight ratio exceeding that of the constituents is the main attribute which makes mechanics of composite materials a more popular area of interest.

LAMINA & LAMINATES

Lamina- A lamina is a building block of a laminate. It is a sheet comprised of fibers. The fibers can be bidirectional,

unidirectional, woven, continuous or discontinuous. The fibers are distributed in a matrix which can be metallic, organic or ceramic. The principal function of matrix is to protect and support fibers. It also provides means for distributing load between the fibers.

OBJECTIVE AND SCOPE OF PRESENT INVESTIGATION

The objective of the present investigation is to predict first ply failure load of laminated composite plate having uniformly distributed load. The formulation is implemented by a computer code developed for this purpose to carryout static analysis. In static analysis, the solution of the governing equation is carried out by factorizing the structural stiffness matrix using the technique of Cholesky's decomposition. The eigen value problems are solved by the simultaneous iteration technique of Corr and Jennings (1976).

The computer code based on the efficient layer-wise finite element model is used to calculate first-ply failure load covering different features such as plate boundary condition, stacking sequence, thickness ratio and skew angle. The results obtained in the form of load, deflection, stresses are presented in tables as well as in graphical manner. The convergence of results with mesh refinement is tested with different lamina combinations and h/a ratio. In many cases, the results obtained by the proposed model are validated with the help of published results. In addition to those, a large number of new results specifically for laminated composite plates are presented for future references. Though some results are available for simple cases of laminated composite plate but there is no published result for the case of laminates having varying skew angle, h/a ratio, plate boundary condition and ply stacking.

II. LITERATURE REVIEW

For the proper design of laminated composite and sandwich laminates, the modelling of transverse shear stresses at the layer interfaces (inter-laminar shear stresses) is quite difficult. The effect of shear deformation is found important due to relative weakness of the material in shear compared to stretching for that reason, the shear deformation should be accurately modeled for laminated structures to obtain consistently good results for stresses and deflections. Investigation on composite and sandwich plates started in mid 20th century but research started and expanded more intensively over the last 30 year. With widely increased application of laminated composite plate in the industry, researchers all over the globe started exploring different aspects of plates. In the beginning, bending, twisting characteristics were started being explored using complex



Wind turbine electrohydraulic transmission system control for maximum power tracking with pump fault

Proc IMechE Part E:
Systems and Control Engineering
1–15
© IMechE 2023
Article reuse guidelines:
sagepub.com/journals-permissions
DOI: 10.1177/09596518231155691
journals.sagepub.com/home/pii
SAGE

Neeraj Kumar , Paladugu Venkaiah, Bikash Kumar Sarkar
and Subhendu Maity

Abstract

The wind power generation system plays a significant role in the power sector as it is an environment-friendly green power system, increasing power demand, and technological development in wind power systems. Wind turbine systems are exposed to the harsh environment with continuous variation of wind speed with gusts causing damage and failure in system components along with the fluctuation of generated power. The hydrostatic transmission system has become one of the promising solutions over the gear transmission system for transmitting power from the turbine rotor to the generator. Further to reduce power generation costs in wind power systems, a suitable control system with parametric uncertainty and system fault plays a significant role. In this study, the 5 MW wind turbine model has been developed with the combination of blade element momentum theory and the electrohydraulic transmission system model. Moreover, the wind turbine system model has been imposed fault in the pump of electrohydraulic transmission system. The proposed wind turbine system model has been validated with the existing result. The blade element momentum theory has been used to estimate the optimum pump turbine couple rotational speed for maximum power tracking. Double loop controller has been used for wind turbine power transmission system control. The first controller loop has been used for pump and wind turbine system speed control for maximum power tracking, as a passive fault tolerance controller and the second control loop for motor and generator system speed control to regulate the frequency of the generated power. Interval type 2-fuzzy proportional–integral–derivative controller are suitable for high degree of uncertain system like wind power system due to their footprint of uncertainties. Proper choice of footprint of uncertainty provides robust performance against uncertainties and dynamic performance. Hence, the primary and secondary controller has been developed as interval type 2-fuzzy proportional–integral–derivative with inertial weight local search–based teaching–learning-based optimization controller. The inertial weight local search–based teaching–learning-based optimization interval type 2-fuzzy proportional–integral–derivative controller performance has been studied with benchmark sinusoidal test signals. The proposed inertial weight local search–based teaching–learning-based optimization interval type 2-fuzzy proportional–integral–derivative controller performance has been also compared with conventional proportional–integral–derivative and interval type 2-fuzzy proportional–integral–derivative controller. The proposed system performance has been compared with contemporary reported digital hydrostatic transmission wind turbine system and recently reported controller with consideration of fault in the pump. The proposed inertial weight local search–based teaching–learning-based optimization interval type 2-fuzzy proportional–integral–derivative controller performance has been compared through integral absolute error with interval type 2-fuzzy proportional–integral–derivative controller and recently reported proportional–integral–derivative sliding mode controller obtained as 0.0016, 0.0029, and 0.0031, respectively.

Keywords

Electrohydraulic, fuzzy type 2, transmission, wind turbine, teaching–learning-based optimization, inertial weight local search

Date received: 28 April 2022; accepted: 20 January 2023

Department of Mechanical Engineering, National Institute of Technology
Meghalaya, Shillong, India

Corresponding author:

Neeraj Kumar, Department of Mechanical Engineering, National Institute
of Technology Meghalaya, Shillong 793003, India.
Email: neeraj.kumar@nitm.ac.in





Contents lists available at ScienceDirect

Materials Today: Proceedings

Journal homepage: www.elsevier.com/locate/matpr

Condition monitoring of hydraulic transmission system with variable displacement axial piston pump and fixed displacement motor

Neeraj Kumar^{*}, Rahul Kumar, Bikash Kumar Sarkar, Subhendu Maity

Department of Mechanical Engineering, National Institute of Technology, Mezhalaya, Shillong 793003, India

ARTICLE INFO

Article history:

Received 3 August 2020

Received in revised form 11 September 2020

2020

Accepted 14 September 2020

Available online xxxx

Keywords:

Condition monitoring

Axial piston pump

Leakages

Transmission system

Fault detection

ABSTRACT

Electrohydraulic power transmission systems are used in industries, automobiles, mining, aircraft, wind turbine system, machine tool etc. To increase safety and reliability, it has become essential to know the health of the system components. So, fault detection of transmission system components has become necessary to reduce maintenance costs and prevent accidents. The leakage based health monitoring of a transmission system with variable displacement axial piston pump and fixed displacement hydraulic motor has been studied. In the present investigation, an axial piston pump of the transmission system has been analyzed for health monitoring. Mathematical modeling of the transmission system has been carried out in details. The wear between piston and cylinder bore has been considered as the primary cause of fault. The deviation of flow characteristic from normal flow due to increased leakage gap has been considered as a parameter for pump health monitoring. The performance of the transmission system has been studied due to variation pump leakage flow due to increase leakage gap. The present investigation has been carried out through a simulation study in Matlab Simulink environment.

© 2020 Elsevier Ltd. All rights reserved.

Selection and Peer-review under responsibility of the scientific committee of the International Mechanical Engineering Congress 2019: Materials Science.

1. Introduction

The industrial automation and integration of machines in a common platform through the internet of things has become recent trends of development. The integration of the different devices in a common platform can be executed through sensor integration and proper controller design. To improve productivity in the industries, health monitoring plays a significant role. Recently researchers are reported significant contributions towards condition monitoring [1–5] of system components in manufacturing industries. The electro-hydraulic power transmission system can be used in industries, automobiles, mining, marine system, wind turbine system, hybrid vehicles, military, machine tool technology, etc. The electro-hydraulic power transmission system can be used for short distance and high power transmission condition. The advantages of the hydrostatic power transmission system are robust, good controllability, high power to weight ratio, the self-lubrication property so forth. The critical components of

the modern power transmission system are positive displacement hydraulic pump, hydraulic motor, control valves, and prime mover such as electric motor, IC engine to drive pump, control system, other accessories like sensors, data acquisition system, etc. In industrial applications, it has become very much essential to monitor the health of the transmission system and its components. Some researcher has reported research on health monitoring of hydraulic transmission system. Among those, Zhao [6] reported condition monitoring of hydraulic crane for tilting, rotating, feeding operation by vibration signature. During the last fifty years, few researchers have limited attention to condition monitoring of the hydrostatic transmission system and its component performance. Li [7] reported condition monitoring of the axial piston positive displacement pump. Athanasatos et al. [8] bond graph approach for fault diagnosis of the hydraulic system through internal leakage detection.

Moreover, Razavi [9] put forward on Kalman filter for health monitoring, which has a model-based online health monitor for hydraulic automatic fish processing machines. Some researchers have reported the simple mathematical modeling of the closed-loop hydrostatic transmission system. Although, Mandal et al. [10] developed the detailed modeling of an axial piston pump to

^{*} Corresponding author.

E-mail address: neeraj.kumar@nitm.ac.in (N. Kumar).



Neeraj Kumar



Performance Analysis of the Swashplate Axial Piston Pump with Hydraulic Fluid Temperatures

Neeraj Kumar*, Rahul Kumar, Bikash Kumar Sarkar and Subhendu Maity

Department of Mechanical Engineering, National Institute of Technology Meghalaya, Shillong 793 003, Meghalaya, India

Received 23 June 2020; revised 14 October 2021; accepted 20 October 2021

Variable displacement axial piston pump can be used in a hydraulic system as the primary source of fluid power, which is suitable for high pressure and high efficiency. The power can be transfer in a hydraulic system with the help of the fluid medium. The oil leakage problem in various parts of the pump, especially the internal leakages in the piston-cylinder, swash plate-slipper pad and valve plate-cylinder block, seriously affect the performance of the pump. Therefore, it is important to know the properties of the fluid and its effect on the system performance. To study the performance of an axial piston pump, a non-linear mathematical model has been developed. The developed model has been validated with the existing results. The validated pump model has been used for performance analysis of the system. Moreover, the influence of hydraulic mineral oil at different temperatures on the piston chamber pressure, output power, and leakage flow in piston-cylinder has been explored. The present investigation has been performed in MATLAB Simulink 14a environment. The simulation result shows that the pump operating temperature range can be set as 30°C to 60°C for moderate ripple and output chamber pressure.

Keywords: Hydraulic system, Bulk modulus, Chamber pressure, MATLAB Simulink


Introduction

The swash-plate type axial piston pump can be used in a hydraulic system as the main fluid power source. In fluid power systems, power is transferred through hydraulic oil, therefore the oil properties like density, viscosity, and bulk modulus affect its dynamic performance. Apart from hydraulic oil properties, oil leakage also affects the performance of the hydraulic system.¹ Various types of hydraulic oil can be used for fluid power systems based on their properties. Hydraulic systems suffer from huge energy loss as they operate at high pressure. Researchers are attracted to energy efficiency research of hydraulic systems. The dynamic performance of hydraulic system degrades due to leakage of hydraulic fluid in the system while operation and variation of oil properties due to change of oil temperature.²⁻⁴

Many previous researchers have reported on the reduction of pressure ripple and flow ripple using groove geometry and different controller design. Only a few have studied the temperature analysis on chamber pressure and output power of an axial piston pump by using different hydraulic fluids. Kim *et al.* (2003)⁽⁶⁾ conducted an experiment on the axial piston

pump to measure the fluid film thickness on the valve plate using hydraulic oil as a fluid medium. Javalagi *et al.* (2012)⁽⁷⁾ studied the different hydraulic fluids available and their effect on system performance. They found that for low dynamic viscosity, the efficiency of the system decreases. The noise of the system has been significantly reduced by using mineral oil and synthetic oil. Recently, Song *et al.* (2018)⁽⁸⁾ reported research on the influence of temperature on piston-cylinder interface leakage in an axial piston pump. The efficiency of the axial piston pump decreases with increase in temperature as contact time increases monotonically in the form of hyperbolic tangent. Kazama (2009, 2015)^(9,10) and Kazama *et al.* (2010)⁽¹¹⁾ used thermocouples amplifier for measurement of temperature on bearing and seal parts of variable displacement pump. They have considered mineral oil of VG22 and a water-glycol having a temperature range of 20 to 40 degrees. Finally, they concluded that temperature raises much less using water-glycol-oil as compared to mineral oil. Cai *et al.* (2015)⁽¹²⁾, Feo *et al.* (2015)⁽¹³⁾, and Cancino *et al.* (2018)⁽¹⁴⁾ studied the effect of hydraulic oil temperature on tribological behavior of steel-steel contact and performance of engine lubricated at higher temperature respectively. Along with that, Borghi *et al.* (2009)⁽¹⁵⁾ and Tang *et al.* (2017, 2018)^(16,17) investigated numerically the dynamic behavior of axial piston pump, motor slipper bearings,

*Author for Correspondence
E-mail: yadavjnk@gmail.com

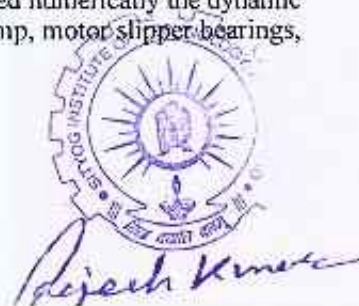

Review Article

Study of MPPT Techniques in PV Based Renewable Energy System

Prof. Samarjit Singh¹ and Prof. Ashwini Mishra²

^{1,2}Assistant Professor, Sityog Institute of Technology, Aurangabad, India

ABSTRACT

Energy plays an essential role in the development process. It is almost impossible to achieve sustainable development without energy, "Since access to modern energy lies at the heart of human development. The energy requirement is increasing steadily worldwide, and this requirement is being met by both conventional(non-renewable) and non-conventional (renewable) energy sources. It is now realize that renewable energy has to be used to greater extent so as to achieve the country goals, i.e reduction of greenhouse gases and energy demand fulfilment, Due to non-availability of sufficient resources and a considerable amount of emission of pollutants from conventional sources and the increasing constraints led by the international agreement, In fact, in line with the problems and difficulties of acceptance of new technologies, there are barriers to solar energy use that cause difficulty for running and operating solar energy systems many research examinations show that a solar panel practically converts 30-40% of energy incident on it to electrical energy. To increase the efficiency of solar panel a Maximum Power Point Tracking approach is necessary. The objective of this examination to the use of photovoltaic (PV) applications are dominating in the renewable energy market today. The rise in PV application is mainly due to the improved PV efficiency and its low marginal costs. Along with this surge of PV application in today's electronic industry, the need for more efficient DC-DC converters that integrate with the PV panels are also in demand. Another important aspect is the development of a controller for the power converter board, which always ensures the maximum power out of the PV panels.

KEYWORDS

Renewable Energy, Photo Voltic cell, Solar Energy, DC-DC Converters, Green Energy Generation.

1. INTRODUCTION

Renewable energy is energy that can be obtained naturally. Natural resources such as sunshine, wind, tides, waves, biomass, and geothermal heat are used to create it. In contrast to fossil fuels, which are rapidly depleting, such resources are inexhaustible. Another significant issue working against fossil fuels is pollution caused by their combustion. In contrast to its conventional equivalents, renewable energy sources are recognized to be cleaner and produce energy without the adverse impacts of pollution, despite the world's increasingly diminishing stocks of fossil fuels.

The market for renewable energy technology has been steadily expanding, and renewable energy projects performed by developing countries contribute to poverty reduction. Because of mass production and market rivalry, as well as widespread adoption, renewable energy solutions are becoming more affordable.

There are various sorts of renewable energy sources, including

a. Solar energy

Solar energy is a significant source of renewable energy. The sun's energy is captured as heat and radiant light. Solar energy can be used to generate solar thermal energy, which is used in space heating. Solar energy may also be transformed into electrical energy, which can then be used for a variety of purposes. It has a higher initial installation cost, but it provides long-term benefits.

b. Wind energy

Using wind turbines, wind power is generated from wind flow. The wind's kinetic energy can be turned to mechanical energy, which can then be transferred to electrical energy. Wind turbines are used to collect energy from the wind. An air turbine's output power is exactly proportional to the cube of wind speed.

c. Hydro energy

Hydropower is a type of renewable energy that can be harnessed and converted into electricity and is found in flowing water. Hydropower is increasingly-being used in

Abstract

To inculcate the green Home Energy Management System (HEMS) based on ZigBee communication. The feedback on energy consumption to energy users is known to be effective to reduce total energy use. A typical HEMS just shows the energy consumption of the whole home and home appliances. Users cannot figure out how efficient a home appliance is, compared to the others. So it is necessary to compare the energy usage of home appliances to that of the same kinds of home appliances. This paper describes more efficient green home energy management system to reduce power consumption in home area on energy comparison.

Keyword- HEMS, ZigBee, Energy Usage, Home Appliance.

Introduction

As more and more home appliances and consumer electronics are deployed, power consumption in home area tends to grow. The current energy crisis and greenhouse effect require more efficient energy management in all areas. Users can control the energy consumption situation of household appliances, and can save 5% to 15% of the power consumption in each month on average [1] [2]. Therefore, reducing energy use in homes is a very challenging target to mitigate the energy crisis and the environmental problem. The technology to reduce and manage home energy use is known as home energy management system (HEMS). Architecture of home energy saving system based on energy-awareness was proposed for real-time home energy monitoring service and reducing standby power of home appliances [3]. A number of HEMS were proposed and developed [4]. The previous HEMS's monitored and controlled home devices, and showed home energy information. However, the previous works just showed the energy consumption information of homes and home appliances. Users cannot figure out whether a specific home appliance is energy efficient. It is necessary to compare energy usage of a home appliance to that of the same kind of typical home appliances or other's home appliances. This paper presents a green home energy management system through comparison of energy usage between the same kinds of home appliances.

Green Home Energy Management Related Work

In the proposed green home energy management system home appliances are connected to the electrical outlets. In fig. 1 home section I & II transmits the energy usage through Zigbee communication to the monitoring section fig.2. Electrical outlets are connected to the home section I & II fig.1 and it measures energy usage by energy meter. The electrical outlets have a function of energy measurement of home appliances and the capability of ZigBee communication as in [5]. The HEMS in the home server gathers the energy information from the electrical outlets and displays hourly, daily, weekly, and monthly energy usage of home appliances with this a user can figure out detailed energy information. The electrical outlets also identify whether the connected home appliance is turned on or turned off and whether it is on the standby state or the normal state by measuring the consuming power. And comparison of energy usage is done by using reference or typical energy values of home appliances.





International Journal of Science and Research (IJSR)

www.ijsr.net

ISSN (Online): 2319-7064

Notification of Acceptance

Date

Dear Dr. SUNIL KUMAR JHA, Dr. V K Singh, Dr Sitiesh Prasad Sinha, Prof Saroj Ranjan,

Your article has been accepted for publication in the International Journal of Science and Research (IJSR).

For inclusion in the January 2022 Issue, We request you to complete the Final Submission on or before 29.1.2022, 11 P

Your article will be published in the January 2022 Issue within 3 working days of completing Payment and Final Sub

For inclusion in the February 2022 Issue, We request you to complete the Final Submission on or before 07.2.2022, 11

If you have any queries or doubts or need Deadline Extension, then please feel free to contact us at editor.ijsrnet@

Important Information

Paper ID : SR22127151308

Paper Title : Performance Implications on Cloud Computing

Payable Fee : Rs. 3550 INR (This Fee Excludes Hard Copy Cost)

How to make a Final Submission?

1. Upload your Final Article and Payment Proof at this link only <https://www.ijsr.net/finalsubmit.php>.

Click the link below to Pay Fee Online

Pay Fee via Credit / Debit Card, IMPS, Google Pay or Netbanking

Important News: GET e-Certificate, ABSOLUTELY FREE! You can also prepare an e-Presentation for this article published as well in the International Journal of Science and Research (IJSR). Click here for Complete Details

With Wi

Managing Editor, International Journal of Science and Re





© Dr S. K. Jha, Dr V. K Singh, Dr Sitiesh Kumar Sinha, Dr. Megha Sinha

1

A Comprehensive Study on IoT: Major challenges

Dr S. K. Jha¹, *Dr V. K Singh², Dr Sitiesh Kumar Sinha³, Dr. Megha Sinha⁴

¹Director, Sityog Institute of Technology, Aurangabad

²Registrar, SBU, Ranchi, Jharkhand

³Director CV Ramah University Muzaffarpur

⁴Department of CSE, Sarala Birla university, Ranchi

*email: drvksingh@gmail.com

Abstract

IoT is the unique domain that will work on various things that enables human being to interact with web services as well as helps to obtain the goal of creating a smart world. In this context the research and development challenges to create a smart world, IoT works in all the fields such as making smart city, developing smart transportation system, making smart industry and many other things. The goal of Internet of Things is to connect the people, objects, places at anywhere by introducing various new paradigm. This is the aim of IOT to connect the people, places, things together. A Web service is a type of software application providing platform for IOT based protocols. This paper presents the glance on the IOT and a list of 10 common challenges faced by enterprises that cause quality issues, leading to the project failure, including budget overruns and long completion times.

Keyword: Web service dictionary, WDL, SOAP, Web Server

1. Introduction

The Internet of Things (IoT) refers to a system of interrelated, internet-connected objects that are able to collect and transfer data over a wireless network without human intervention. The Internet of Things (IoT) describes the network of physical objects—"things"—that are embedded with sensors, software, and other technologies for the purpose of connecting and exchanging data with other devices and systems over the internet. These devices range from ordinary household objects to sophisticated industrial tools.





5. A Survey on IoT and Big Data : Relationship and Challenges

*Dr S. K. Jha¹, *Dr V. K Singh², Dr Sitiesh Kumar Sinha³, Dr. Megha Sinha⁴*

¹Director, Sityog Institute of Technology, Aurangabad

²Registrar, SBU, Ranchi, Jharkhand

³Director CV Raman University Muzaffarpur

⁴Department of CSE, Sarala Birla university, Ranchi

*email: drvksingh@gmail.com

Abstract

Today, technological advances are gaining momentum in the lives of users, but also in the world of business, health, industry, and the military. One of the most promising technologies is the IoT, or Internet of Things, which will allow physical objects to connect to the Internet, thus optimizing their functioning by generating data. However, in a world where data is becoming king, it must be handled efficiently and the means of IT must allow to store an ever-increasing number of data. This is where Big Data takes on its importance. Big Data refers to a massive set of data that no conventional data management tool can handle. Big Data is therefore a concept that allows access to gigantic databases in real time. It has three main features. Big Data's main objectives are to improve a company's or system's responsiveness to a large amount of data collected, increase productivity and refine knowledge of customer behavior, so that it can offer personalized offers or advertisements and create new trends. The Internet of Things will comprise many millions of systems, in which some of them belongs to big data. The aggregated information from these systems represent, really big data systems. The problems arising from so many devices, data and processing coming together are likened to an international market, with similar challenges. These big data problems in the IoT are reviewed from a reliability engineering perspective.

Keywords: Big Data, Big Data Challenges, Volume of data, Velocity of data, IoT

